


CONVENTIONAL FLOODED MOTORCYCLE BATTERY

LB10L-B(J) (12V11Ah)

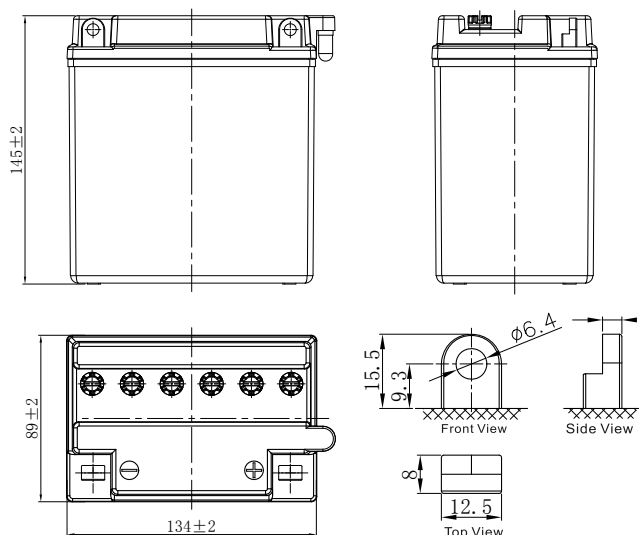

GENERAL FEATURES


- Low maintenance
- High performance and dry charged high quality and flooded battery
- Shipped in dry condition with a separated acid pack

*Values are subject to variation of +/- 5% in normal manufacturing processes.

CHARACTERISTICS

Item	Specifications
Nominal Voltage	12V
Nominal Capacity (10HR)	11Ah
Cold Cranking Performance Amps@0°F (-18°C)	100A
Dimension (±2mm)	Length 134mm (5.28inches)
	Width 89mm (3.50inches)
	Container Height 145mm (5.71inches)
	Total Height 145mm (5.71inches)
Battery (with acid)	Approx Weight 3.65kg (8.05lbs)
Electrolyte	Approx Weight 1.02kg (2.25lbs)
Terminal type	B
Battery type	Conventional Flooded (High Performance) Series
Full Charge	Constant-Voltage Charge:
	Initial charging current Less than 0.3C ₁₀
	Voltage 14.40V~15.00V at 25°C (77°F)
	Charging time 16~24h
	Constant-Current Charge:
	Charging current 0.1C ₁₀ , when charging voltage up to 15.60V, continue to charge 2h
Floating Charge	Initial charging current Unlimited
	Voltage 13.50V~13.80V at 25°C (77°F)
Capacity affected by Temperature	40°C (104°F) 106%
	25°C (77°F) 100%
	0°C (32°F) 86%
	-15°C (5°F) 65%

Discharge Characteristics (25°C, 77°F)

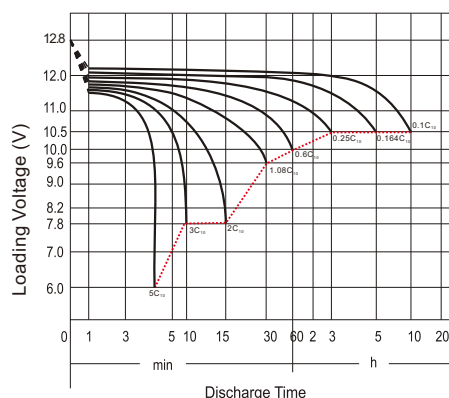

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu