
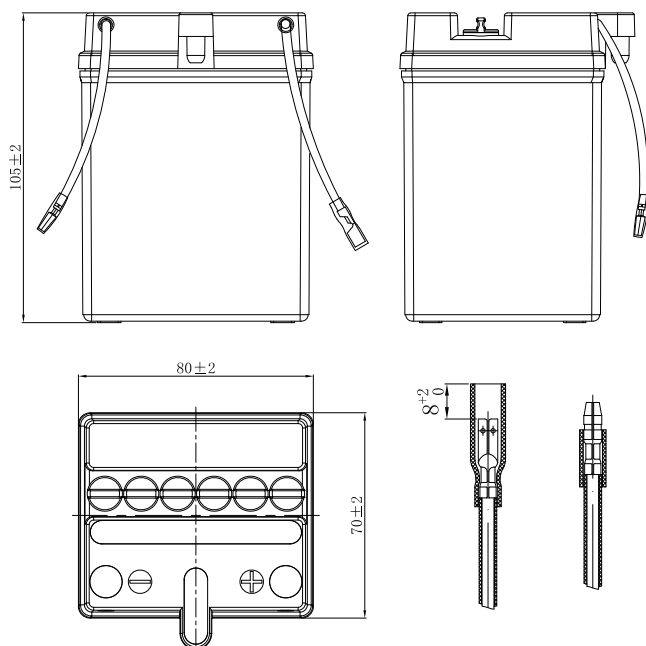


CONVENTIONAL FLOODED MOTORCYCLE BATTERY

LB2.5L-C (12V2.5Ah)

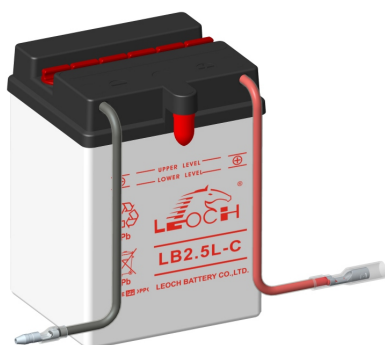

GENERAL FEATURES


- Low maintenance
- High performance and dry charged high quality and flooded battery
- Shipped in dry condition with a separated acid pack

*Values are subject to variation of +/- 5% in normal manufacturing processes.

CHARACTERISTICS

Item	Specifications
Nominal Voltage	12V
Nominal Capacity (10HR)	2.5Ah
Cold Cranking Performance Amps@0°F (-18°C)	19A
Dimension (±2mm)	Length 80mm (3.15inches)
	Width 70mm (2.76inches)
	Container Height 105mm (4.13inches)
	Total Height 105mm (4.13inches)
Battery (with acid)	Approx Weight 1.10kg (2.43lbs)
Electrolyte	Approx Weight 0.33kg (0.728lbs)
Terminal type	
Battery type	Conventional Flooded (High Performance) Series
Full Charge	Constant-Voltage Charge:
	Initial charging current Less than 0.3C ₁₀
	Voltage 14.40V~15.00V at 25°C (77°F)
	Charging time 16~24h
	Constant-Current Charge:
	Charging current 0.1C ₁₀ , when charging voltage up to 15.60V, continue to charge 2h
Floating Charge	Initial charging current Unlimited
	Voltage 13.50V~13.80V at 25°C (77°F)
Capacity affected by Temperature	40°C (104°F) 106%
	25°C (77°F) 100%
	0°C (32°F) 86%
	-15°C (5°F) 65%

Discharge Characteristics (25°C, 77°F)

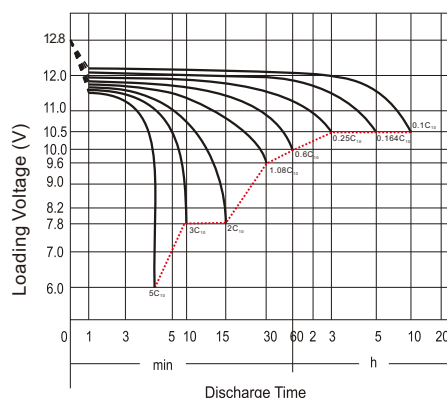

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu